

METHOD STATEMENT

10MM & 20MM

MATT & TEXTURED PORCELAIN



PROJECT STAGE

AFTER INSTALLATION
FULLY CURED
STANDARD GROUT REMOVAL

INTRODUCTION


THE PURPOSE OF THIS METHOD STATEMENT IS TO EXPLAIN THE CORRECT APPLICATION OF TILEMASTER GLOBAL PRODUCTS REQUIRED FOR CLEANING, PROTECTION & MAINTENANCE OF MATT & TEXTURED PORCELAIN TILES FOR INTERNAL & EXTERNAL USE TO HELP PRESERVE THE APPEARANCE OF THE TILES.

CLEANING AFTER INSTALLATION

TO REMOVE RESIDUES OF CEMENT GROUTING WE RECOMMEND TO USE THE SPECIFIC ACID DETERGENT CLEANER NO 4, AN ECO FRIENDLY DETERGENT FOR END-OF-INSTALLATION WASHING: IT REMOVES GROUT RESIDUES, PLASTER, BUILDING SITE DIRT, RUST STAINS AND LIMESCALE. IT IS SAFE TO USE IN ENCLOSED AREAS AND IT WILL NOT TARNISH STAINLESS STEEL AND ALUMINUM.

PRODUCT SELECTION

TILEMASTER
CLEANER NO 4

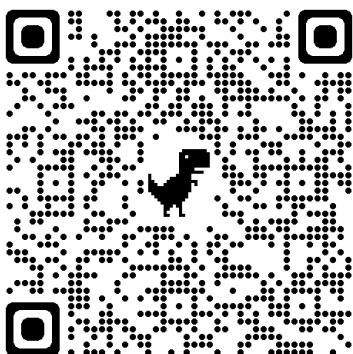

SCAN FOR PRODUCT INFO



GET HELP
FROM A PRO

EQUIPMENT

TILEMASTER 40 MACHINE, PAD B OR ABRASIVE HAND SPONGE. MICROFIBRE CLOTHS, SPONGES, MOP & BUCKET, WET VAC

COVERAGE

1LT FOR 40 SQM
DILUTED 1:5

PROCEDURE

WET THE SURFACE WELL WITH WATER BEFORE WASHING. THEN USE CLEANER NO 4 DILUTED AT A RATIO OF 1:5 OR 1:10 (1 LITER OF PRODUCT IN 5 OR 10 LITERS OF WATER). APPLY THE SOLUTION A FEW SQUARE METERS AT A TIME, THEN ADD, ALLOW CONTACT TIME OF 5 MINUTES, THEN WORK WITH A TILEMASTER 40 MACHINE FITTED WITH GREEN PAD B . REMOVE ALL RESIDUES USING A CLEAN CLOTH OR LIQUID VACUUM AND RINSE THOROUGHLY WITH PLENTY OF CLEAN WATER. SHOULD ANY STUBBORN DIRT REMAIN, REPEAT THE WASH.



0161 444 0377
INFO@TILEMASTER.CO.UK
WWW.TILEMASTER.CO.UK
UNIT 11, PENNIE VIEW
SHEPLEY LANE
MARPLE
STOCKPORT
SK6 7JW