

METHOD STATEMENT

10MM & 20MM

MATT & TEXTURED PORCELAIN



PROJECT STAGE

DURING INSTALLTION EPOXY GROUT REMOVAL



INTRODUCTION


THE PURPOSE OF THIS METHOD STATEMENT IS TO EXPLAIN THE CORRECT APPLICATION OF TILEMASTER GLOBAL PRODUCTS REQUIRED FOR CLEANING, PROTECTION & MAINTENANCE OF MATT & TEXTURED PORCELAIN TILES FOR INTERNAL & EXTERNAL USE TO HELP PRESERVE THE APPEARANCE OF THE TILES.

CLEANING AFTER INSTALLATION

TO REMOVE EPOXY GROUT RESIDUES TILEMASTER RECOMMENDS USING TILEMASTER EPOXY GROUT REMOVER. THIS IS A HIGH VISCOSITY LIQUID DETERGENT FOR CLEANING EPOXY GROUT RESIDUES, STAINS AND STREAKS FROM WALL AND FLOOR SURFACES. IDEAL FOR NON-ABSORBENT MATERIALS SUCH AS PORCELAIN TILES, GLAZED CERAMIC AND GLASS MOSAICS.

PRODUCT SELECTION

TILEMASTER EPOXY GROUT REMOVER

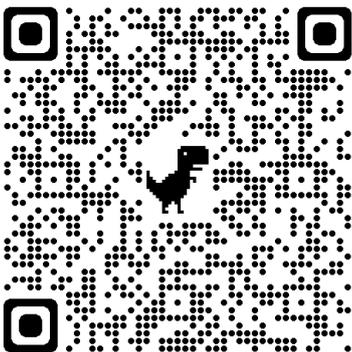

SCAN FOR PRODUCT INFO



GET HELP FROM A PRO



EQUIPMENT

TILEMASTER 40 MACHINE, PAD B OR ABRASIVE HAND SPONGE. MICROFIBRE CLOTHS, SPONGES, MOP & BUCKET, WET VAC

COVERAGE

UP TO 10 M² / 1 L
UNDILUTED

PROCEDURE

BEFORE CLEANING WITH TILEMASTER EPOXY GROUT REMOVER WAIT UNTIL THE GROUTING PRODUCT APPLIED IS READY FOR USE, CLOSELY FOLLOWING THE INSTRUCTIONS GIVEN BELOW. APPLY DIRECTLY TO THE SURFACE TO BE CLEANED USING A LARGE FLAT PAINTBRUSH, PERFECTLY COVERING ALL RESIDUES OF PLASTER. LEAVE FOR ABOUT 30 MINUTES. RUB WITH AN ABRASIVE SPONGE OR EVEN A SPATULA TO REMOVE LARGER RESIDUES. TILEMASTER 40 MACHINE FITTED WITH A GREEN PAD A CAN BE USED FOR FLOORS. RINSE THOROUGHLY. FOR MORE STUBBORN RESIDUES, REPEAT THE SAME PROCEDURE, LEAVING THE PRODUCT TO WORK FOR LONGER.

0161 444 0377
INFO@TILEMASTER.CO.UK
WWW.TILEMASTER.CO.UK
UNIT 11, PENNIE VIEW
SHEPLEY LANE
MARPLE
STOCKPORT
SK6 7JW