

# METHOD STATEMENT

## 10MM & 20MM

### MATT & TEXTURED PORCELAIN



## PROJECT STAGE

### DURING INSTALLATION REMOVING FRESH GROUT



## INTRODUCTION


THE PURPOSE OF THIS METHOD STATEMENT IS TO EXPLAIN THE CORRECT APPLICATION OF TILEMASTER GLOBAL PRODUCTS REQUIRED FOR CLEANING, PROTECTION & MAINTENANCE OF MATT & TEXTURED PORCELAIN TILES FOR INTERNAL & EXTERNAL USE TO HELP PRESERVE THE APPEARANCE OF THE TILES.

## CLEANING AFTER INSTALLATION

WE RECOMMEND TO USE THE SPECIFIC ACID DETERGENT TILEMASTER FIRST WASH, AN ECO FRIENDLY DETERGENT FOR END-OF-INSTALLATION WASHING: IT REMOVES GROUT RESIDUES, PLASTER, BUILDING SITE DIRT, RUST STAINS AND LIMESCALE. IT IS SAFE TO USE IN ENCLOSED AREAS AND IT WILL NOT TARNISH STAINLESS STEEL AND ALUMINUM.

## PRODUCT SELECTION

### TM FIRST WASH

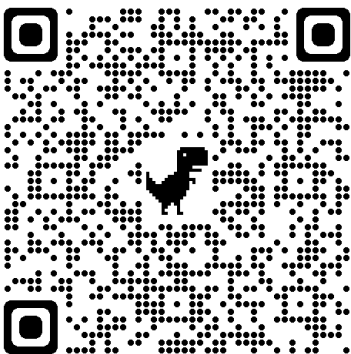

SCAN FOR PRODUCT INFO



## GET HELP FROM A PRO



## EQUIPMENT

MICROFIBRE CLOTH, SPONGE OR TOWEL

## COVERAGE

500ML WILL COVER APPROXIMATELY 240 LINEAR METERS

## PROCEDURE

ONCE THE GROUT HAS STARTED TO CURE, ACCORDING TO THE MANUFACTURER'S INSTRUCTIONS (NORMALLY 10 - 30 MINUTES), CARRY OUT AN INITIAL TEST CLEAN TO THE SURFACE WITH A DAMP SPONGE, THEN PROCEED WITH THE FINAL CLEANING. SPRAY FIRST WASH GROUT REMOVER EVENLY OVER THE SURFACE. ALLOW TO REACT FOR 1-2 MINUTES, DEPENDING ON THE TYPE OF MATERIAL. CLEAN USING A DAMP CLOTH. FOR STUBBORN RESIDUE, REPEAT THE ABOVE INSTRUCTIONS AFTER ONE HOUR. REFER TO THE GROUT MANUFACTURER'S INSTRUCTIONS FOR INDICATION ABOUT WHEN THE SURFACE IS READY FOR TRAFFIC. CAUTION: DO NOT USE ON ACID SENSITIVE MATERIAL. DO NOT USE ABRASIVE SPONGES. ALWAYS TEST THE PRODUCT BEFORE USE TO DETERMINE THE MATERIAL'S RESISTANCE AND THE WAITING TIME REQUIRED FOR THE PRODUCT TO REACH MAXIMUM EFFECTIVENESS

0161 444 0377  
INFO@TILEMASTER.CO.UK  
WWW.TILEMASTER.CO.UK  
UNIT 11, PENNIE VIEW  
SHEPLEY LANE  
MARPLE  
STOCKPORT  
SK6 7JW